






SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

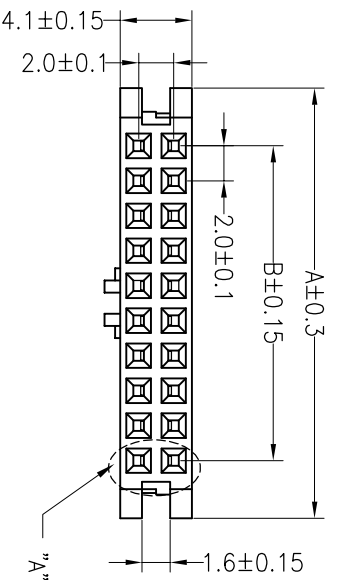

Pin	Dimension mm		
	A	B	C
06	10.60	4.00	5.00
08	12.60	6.00	7.00
10	14.60	8.00	9.00
12	16.60	10.00	11.00
14	18.60	12.00	13.00
16	20.60	14.00	15.00
20	24.60	18.00	19.00
26	30.60	24.00	25.00
30	34.60	28.00	29.00

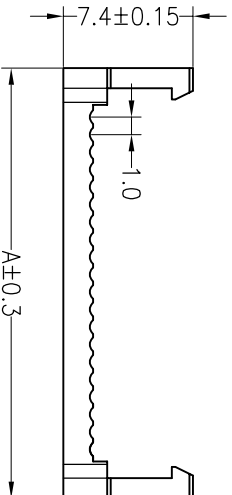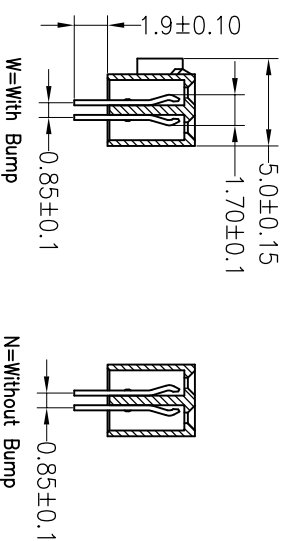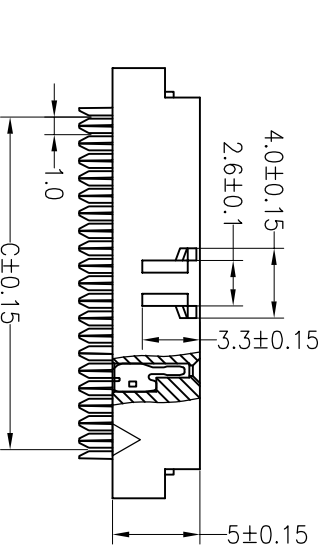

Ordering Information

5324 XX Y B XX B W 01

No. of Pins: 06~64P
 Contact Plating: NO:Gold Flash/Ni, GO:Gold Flash, NI:Ni
 Option Type: W=With Bump, N=Without Bump

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YUuSheng	16.01.16	SCALE		FIT	SHEET	PROJ.	TITLE	PART NO.
				DIM	TOL				UNIT	SIZE					
A0	2016.01.16	NEW DRAWING		X.XX	±0.30	CHECK			mm	A4	1/1			5324XXYBXXBW01	
1				Angle	±3°	APPROVE								2.00 NPin FC(DC) F-Type	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892