


SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

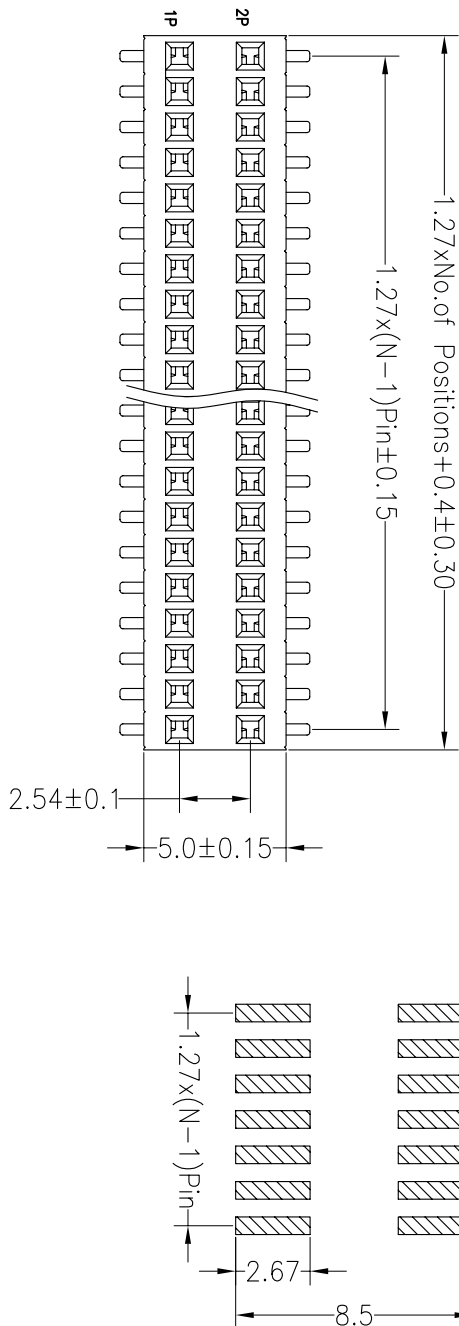

Ordering Information

2557 02 XX X N XX M Y X 01

- No. of Pins Per Row: 2*50
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating Option: G0:Gold Flash, G2:50" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:In
- Packing Option: O=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

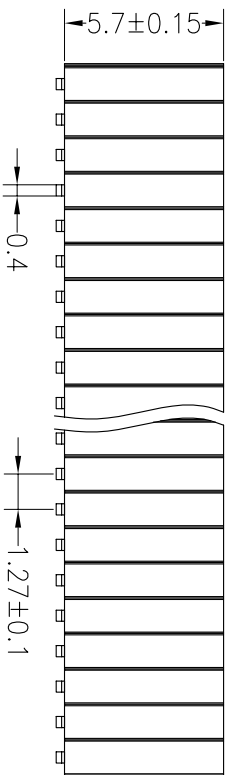

REV		DATE	MODIFICATION DESCRIPTION		CHANGE	OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
1		2015.01.23	NEW DRAWING			X.X ±0.30		Ben		15.01.23		mm		A4		255702XXXXXXMYX01	
2						X.XX ±0.20		CHECK				SIZE					
3						X.XXX ±0.10		APPROVE				SHEET		1/1			
4						Angle ±3°						PROJ.					
5						DIM TOL											
6																	
7																	
8																	
9																	

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 255702XXXXXXMYX01
 TITLE: 1.27*2.54PF 2xNPin H5.7mm SMT