




FILE NO: E302810

SPECIFICATIONS



Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

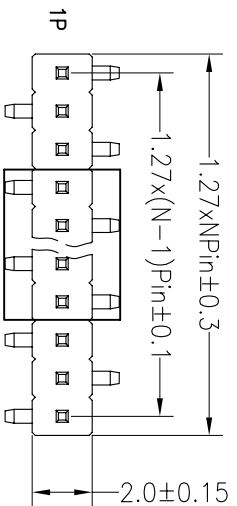

TYPE2

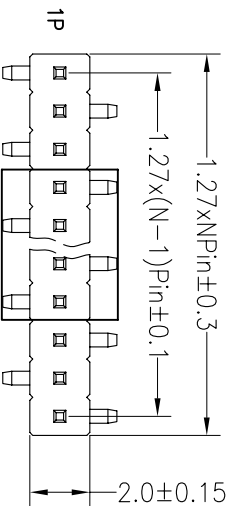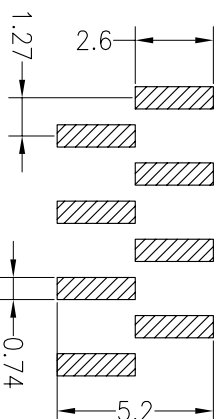



TYPE1

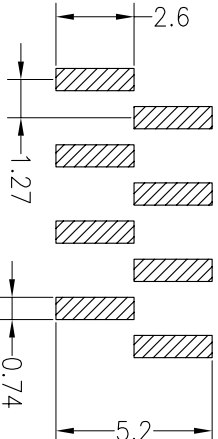

Ordering Information

1410 11 XX X N XX M XXX X 01

No. of Pins Per Row: 2*50
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6I
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G1: Gold Flash
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 SO: Gold Flash/Tin
 SN: Tin
 Pin Length:
 Packing:
 O=PE Bog
 A=Toy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

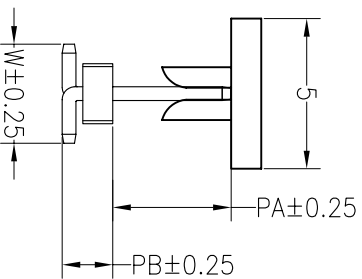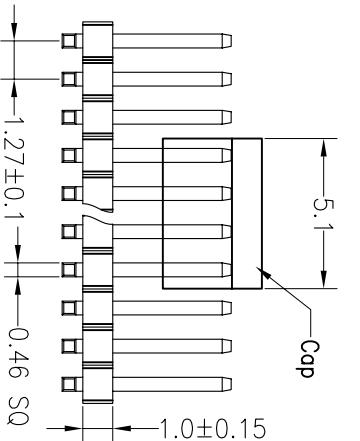

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	4.00	1.50	4.20	7.20
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YHY/Sheng	12.03.28	SCALE		FIT	SHEET	PROJ.	PART NO.	TITLE:
				XX	XX				UNIT	SIZE					
A0	2012.03.28	NEW DRAWING		X.X	X.X				mm	A4	1/1			141011XXXXXXX	1.27PH H1.0mm 1xNpin SMT 带夹持盖

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992