



SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)





Standard: PA6T

Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

1410 22 XX X N XX S XXX X 01

No. of Pins Per Row 02~50P
 Insulator Option A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
 Material
 Contact Plating G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold
 Pin Length Packing 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Wyar
 SN: Tin
 S0: Gold Flash/Tin

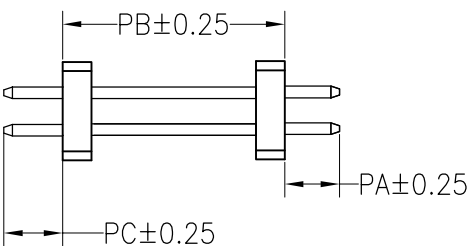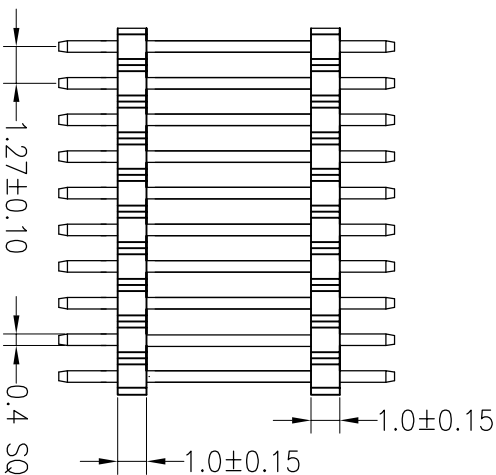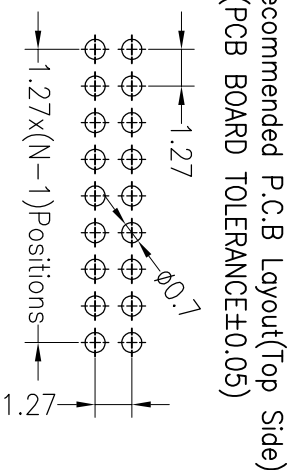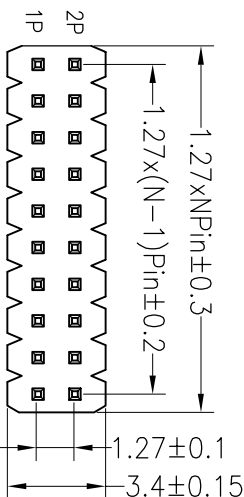

Dimension antitheses list					
ITEM	PA	PC	PB	L	
Standard	3.00	3.00	10.00	16.00	

OPERATION		DRAW		SCALE		FIT		TITLE:	
				UNIT	mm				
X.X	±0.30	chengyigang	19.10.29	A4	1/1	141022XXXXXSXXXX01			
X.XX	±0.20	CHECK				PART NO.			
X.XXX	±0.10					1.27PH 2xnPin H1.0 180° 非平面胶芯			
Angle	±3°	APPROVE				SHEET			
DIM	TOL					PROL.			
CHANGE						MODIFICATION DESCRIPTION			
DATE						NEW DRAWING			
REV						2019.10.29			

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892