

SPECIFICATIONS

Rated (额定参数): 600V,25A
 Dielectric strength (抗电强度): AC2000V/1 Minute
 Insulation Resistance (绝缘电阻):1000MΩ Min
 Contact Resistance (接触电阻):20mΩ Max
 Screw Torque (扭矩): 1.2Nm (10.53lb.in)
 Wire Range (线径):22~12AWG
 Temp. range (操作温度): -40°C~+105°C
 MAX Soldering (瞬时温度):+250°C,5s

Housing Material (塑件): PBT (UL94 V-0)
 Contact (端子): Brass, 1.0t, Tin plating (黄铜镀锡)
 Screw (螺丝): M4.0, Steel, Ni plating (钢 镀镍)





PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM					
OVER	OVER	OVER	OVER	OVER	OVER	OVER	
TO	TO	TO	TO	TO	TO	TO	
6	10	30	60	100	150	150	
10	24	30	60	100	150	150	
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	
						±1.00	

Ordering Information

JL-250 - 121 XX B X 1

Pitch 121=12.10PH
 No. of pins 2P~24P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 F=Grey

Packing
 O=Pe bog
 T=Tube
 A=Troy

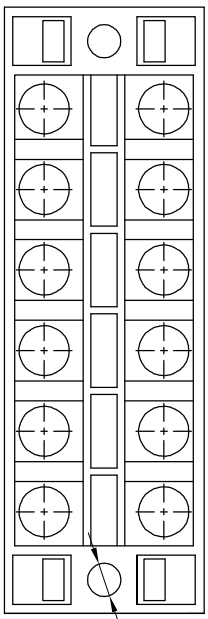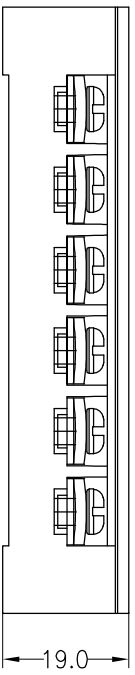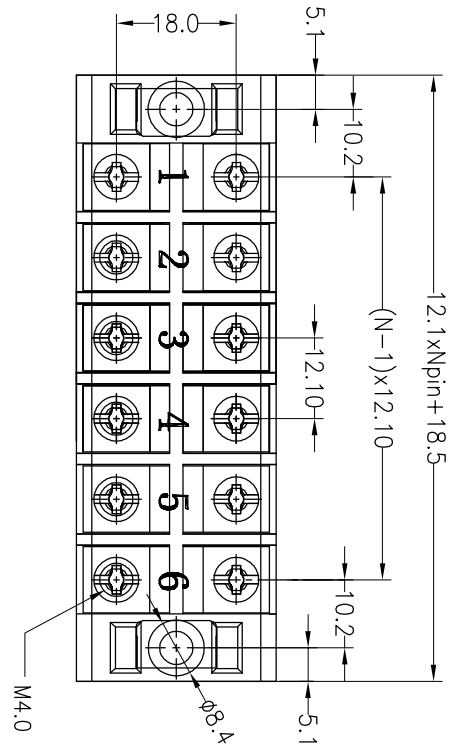

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	UNIT	SIZE	SHEET	PROJ.	TITLE:
A0	2019.09.29	NEW DRAWING		XX X.XX X:XXX	±0.30 ±0.20 ±0.10	CHECK	A4	1/1			JL-250-121XXBX1
1				Angle DIM	±3° TOL	APPROVE					12.10mm Barrier Terminal Blocks

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992